

SmartWhite™ Rice Whitener. DRWD



Brown rice, or 'cargo rice' as it is often known is rice that hasn't undergone the whitening process. It is only after the outer layers of the brown rice have been removed that the seed then becomes white rice; the staple food of recognised by most consumers.

Bearing in mind that the product quality and value depends on the whiteness of the rice and the lowest possible proportion of broken, a high quality whitening machine is crucial to the economic success of a rice mill. There will always be a trade-off between whitening degree and breakage, but a SmartWhite from Buhler machine will produce the highest whiteness with the lowest breakage.


Key Benefits

- High yield whitening
- Minimum on broken
- Gentle and even abrasion
- Long cleaning intervals
- Easy operation
- Easy maintenance

New SmartWhite™ DRWD Whitener delivers Superior Whitening performance.

Working Principle

The processing chamber is the space between the cylindrical grinding rotor and the screens. The grinding rotor consists of silicium carbide rings set one above the other, with spaces between them. The rings are supported by three ribs on the shaft. The ribs create free space for a central air flow between the shaft and the stone rings. This free space is open at both top and bottom, allowing sucked air to come in from both ends and pass through the gaps between the stone rings. Rice is fed from the top of the machine via a feed-screw. It flows directly into the processing chamber. The degree to which the chamber is filled is controlled by a retainer plate at the bottom. Weights are used to adjust the back pressure of the retainer plate.

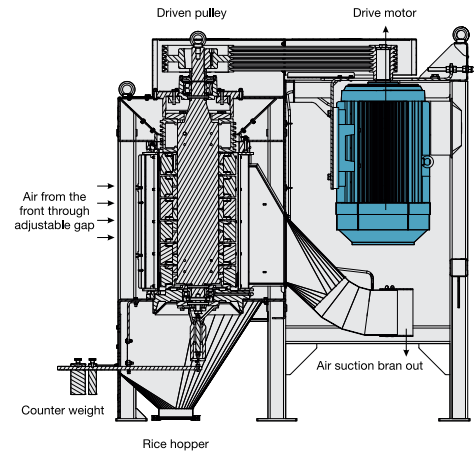

Superior performance

Designed for delivering unparalleled performance, SmartWhite delivers highest whiteness with the lowest breakage.

High reliability and low maintenance

SmartWhite is designed to built to last. It is equipped with reversible feed screw design which doubles the working life of feed screw.

Easy to operate design

SmartWhite is designed for simplicity, with features such as easy sieve frame adjustment mechanism and simple to use controls.



Technical Specification

Machine	Capacity* (kg/h)	Motor (KW)	Aspiration (m3/min)	Approx. Weight (KG)	Volume (m3)	Dimension (L X B X H) in mm
DRWD**	3500 - 4000	30/37	35	850	4	1850 X 820 X 1720

** Standard Machine supply is without motor. Machine supply with motor is also available.

* Capacity as Paddy input basis.

Exclusively Distributed by:

GRAINSCO
Grains Innovation & Solutions Co., Inc.

📍 **MANILA OFFICE**
Unit 206, Veria Bldg., 62 West Avenue,
Quezon City 1104, Metro-Manila, PH

📞 **FARM MACHINERY**
0917 101-8888 / 0919 088-8881

📞 **GRAIN PROCESSING**
0917 103-8888 / 0919 088-8883

✉ info@grainsco.com

🌐 www.grainsco.com

📘 facebook.com/Grainsco

📷 instagram.com/grainscoph

📺 youtube.com/@grainscoph