


CONTINUOUS-FLOW DRYER



- Best for high moisture content grain (above 20%) in short time (4-6 mins)
- Even moisture content grain output by fluidizing with completely mixed flow.
- Most eggs & insect, killed by thermal shock.
- Less power required by 3 injection fans.
- More user-friendly by automatic control feed rate according to moisture content
- More safety operation by auto temp. control and feed control.

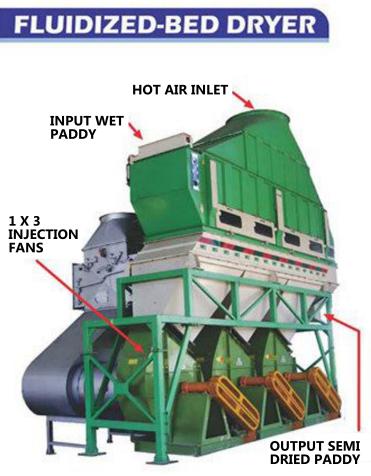

MODEL	FB-20T	FB-10T
INJECTION FANS (BPRc 801)	3 Units	2 Units
AIR VOLUME (CMM.)	3 x 500 = 1,500	2 x 500 = 1,000
(mm.wg)	152	152
MOTOR POWER HP	3x20,25=60,75	2x20,25=40,50
CAPACITY (TPH)	15-22	7-10
VS %M.C. REDUCTION (AT 35% M.C. INPUT)	10%-5%	10%-5%
OVERALL DIMENSION (m) WxLxH	5.5 x 7.0 x 7.2	5.2 x 6.0 x 7.2

SPECIFICATION SUBJECT TO CHANGE FOR THE BETTER PERFORMANCE AND EFFICIENCY.

Exclusively Distributed by:



Grains Innovation & Solutions Co., Inc.

Manila Office: Unit 206 Veria Bldg. 62 West Avenue, Quezon City 1104 Philippines

CUSTOMER CARE HOTLINES:

FARM MACHINERY: 0917 103-8888 / 0919 088-8883 GRAIN PROCESSING: 0917 101-8888 / 0917 102-8888 / 0919 088-8881 ⊠info@grainsco.com

- www.grainsco.com
- facebook.com/Grainsco